



AutoDrain Valve

INTRODUCTION

The Autodrain valve closes when the inlet pressure is more than 1,4 bar pressure. When the pressure falls below 0,6 bar, the valve will open. The Autodrain valve can be fitted with hose connectors or female thread fittings.

TECHNICAL DATA

PN 20 Bar
Close at 1,4 Bar
Open at 0,6 Bar

Different closing pressures can be delivered upon request.

ATEX

According to Article 1,4 of Directive 94/9/EC paragraph 5.2.1 FireProducts has concluded that this product does not require ATEX approval.



TECHNICAL DRAWINGS

Note : All dimensions are in mm. We provide drawings according to customers request.
3D drawing is available upon request.





◀ AutoDrain Valve

ORDERING INFORMATION

- The ordering code is built up according to the following:

FP-V-ADV-01-02-03-04

- FP Fireproducts
- V Valve
- ADV AutoDrainValve

01 MATERIAL

- TI Titanium
- SD SS Super Duplex stainless steel
- SS316 Stainless steel
- LG2 Bronze

02 INLET CONNECTION


- 0,5" BSPM Threaded 1/2" BSPM
- 0,5" BSPF Threaded 1/2" BSPF
- 0,5" NPTM Threaded 1/2" NPTM
- 0,5" NPTF Threaded 1/2" NPTF
- HCO,75 Hose connector 3/4"

03 OUTLET CONNECTION

- 0,5" BSPM Threaded 1/2" BSPM
- 0,5" BSPF Threaded 1/2" BSPF
- 0,5" NPTM Threaded 1/2" NPTM
- 0,5" NPTF Threaded 1/2" NPTF
- HCO,75 Hose connector 3/4"

04 OPTION

- M650 Material according to Norsok M650 (Titanium only)
- C3.1 Material Certificate 3.1
- NONE No option

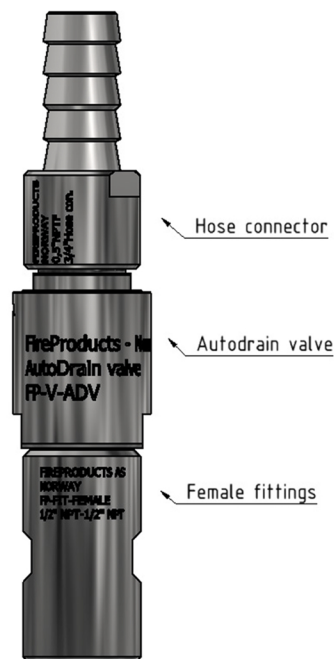

Fireproducts AS
Holskogveien 48
4624 Kristiansand, Norway

Office +00 73 09 99 47
E-mail sales@fireproducts.no

www.fireproducts.no